




LTD

Slot diffuser

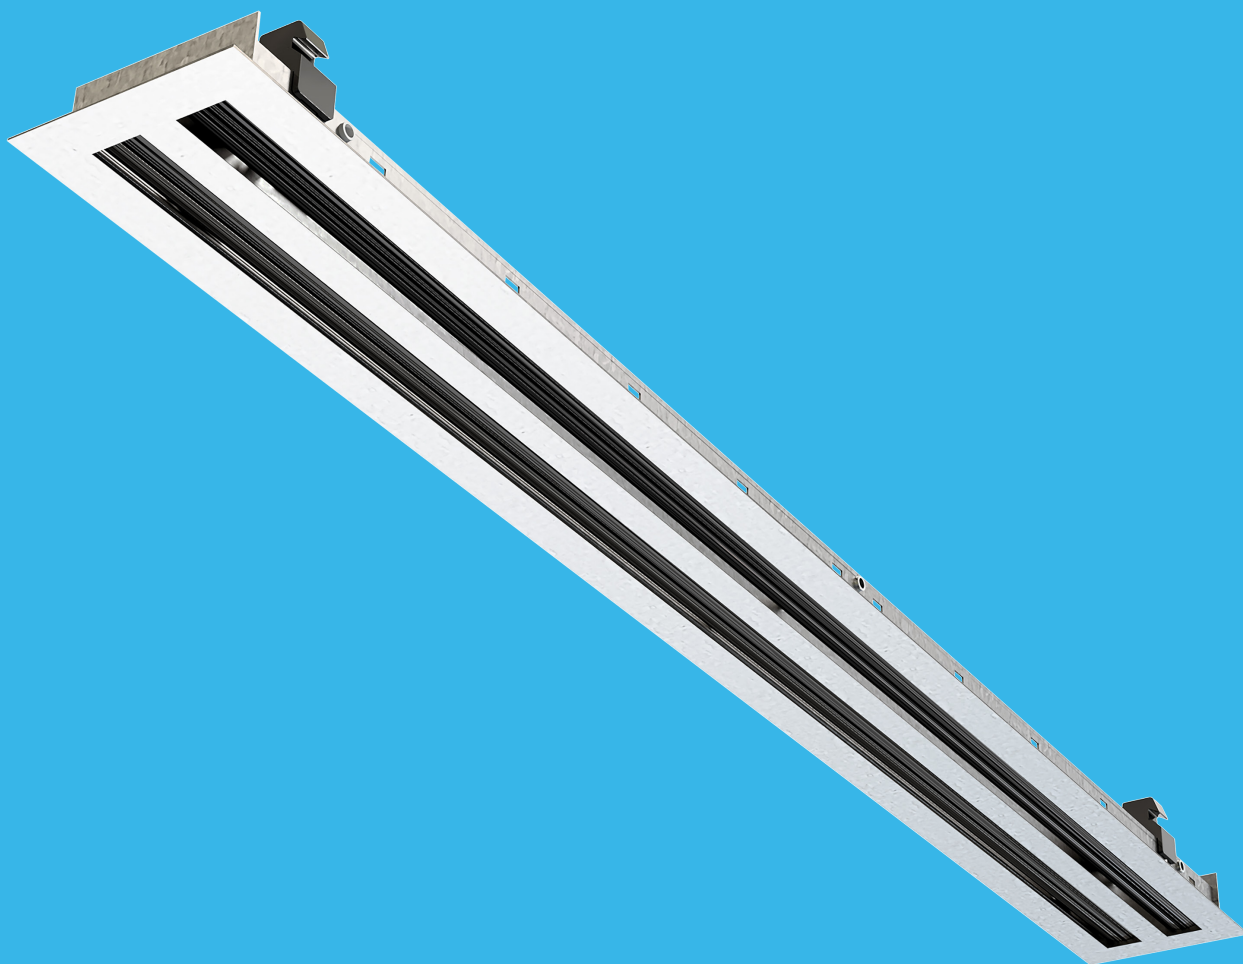

Slot diffuser

LTD



Description

LTD is a linear slot diffuser made of aluminium and suitable for supply and extract air. Equipped with aluminium blade deflectors, LTD can easily manage high airflows with a minimum pressure loss and noise level.

LTD can be installed with the plenum boxes GB, JB, NB or KB, in order to achieve an even flow and individual adjustment.

Easy and fast installation by using quick fix connectors.

- Design linear slot diffuser
- Suitable for supply and extract
- Horizontal and vertical supply air
- Long throw or normal throw for the horizontal position
- Quick fixing system


Order code

Product	LTD	25	a	bbbb	cc	dd
Type	LTD					
Nominal slot width		25				
Number of slots			1, 2, 3, 4, 5, 6			
Length				300-2000 (In steps of 50 mm)		
Colour of profiles						
S0	-	Anodized aluminium				
S1	White	RAL 9010, gloss 30				
S2	White	RAL 9003, gloss 30				
Colour of deflectors						
D0	Black	RAL 9005, gloss 30				
D1	White	RAL 9010, gloss 30				
D2	White	RAL 9003, gloss 30				
D3	-	No deflectors				
D4	-	Anodized aluminium				

Example 1: LTD-25-2-1000-S0-D3

Example 2: LTD-25-3-1000-S1-D1

Dimensions

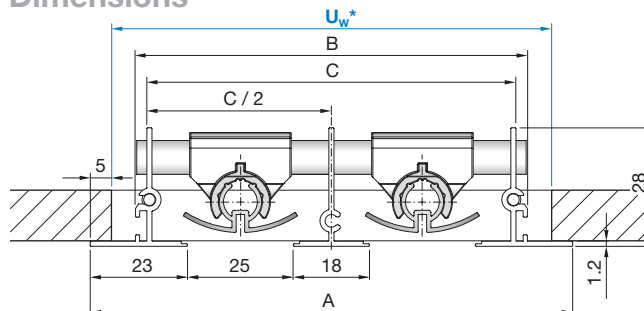


U_w^* = Width cutout dimension in ceiling.
5 mm overlap of flanges $\Rightarrow U_w = A - (2 \times 5 \text{ mm})$.

LTD-25

No. of slots	A mm	B mm	C mm
1	71	50	44
2	114	93	87
3	157	136	130
4	200	179	173
5	243	222	216
6	286	265	259


Length 300 - 2000 mm in steps of 50 mm.

Flange

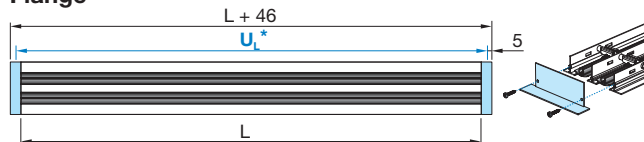

Length cutout dimension in ceiling.
5 mm overlap of flanges $\Rightarrow U_L^* = L + 46 - (2 \times 5 \text{ mm})$.

End plate



Materials & finish

Slot profiles: Aluminium
Blade deflectors: Aluminium

Standard finishing:
Slot profiles: Anodized aluminium
RAL 9010 gloss 30
RAL 9003 gloss 30

Blade deflectors: Black 9005 gloss 30, aluminium
White 9010 gloss 30, aluminium
White 9003 gloss 30, aluminium
Anodized aluminium


The linear slot diffuser LTD is available in other colours. Please contact Lindab's sales department for further information.

Slot diffuser


LTD

Accessories


LTDQ

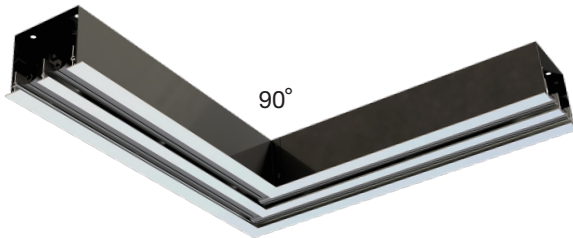

Dimensions

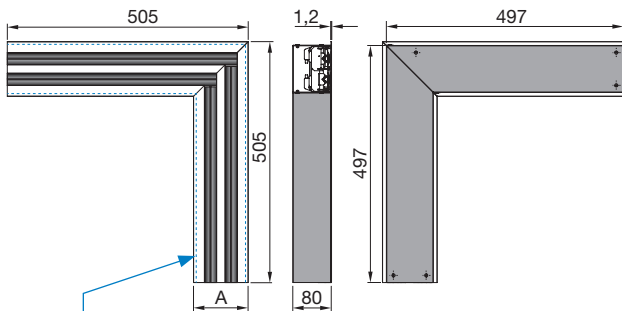

Cutout dimension in ceiling. Always keep 5 mm overlap of flanges. A-dimension, see LTD-25 dimension table on previous page.

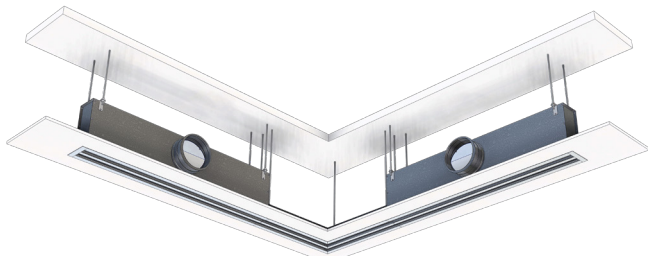

Example above shows continuous strips solution with finished false ceiling. LTD + LTDQ + LTD with GB plenum boxes including E-dampers.


Order code

Product	LTDQ	25	a	bb	cc
Type					
LTDQ					
Nominal slot width					
25					
Number of slots					
1, 2, 3, 4, 5, 6					
Colour of profiles					
S0 - Anodized aluminium					
S1 White RAL 9010, gloss 30					
S2 White RAL 9003, gloss 30					
Colour of deflectors					
D0 Black RAL 9005, gloss 30					
D1 White RAL 9010, gloss 30					
D2 White RAL 9003, gloss 30					
D3 - No deflectors					
D4 - Anodized aluminium					


Example: LTDQ-25-2-S0-D3

Supply air


Horizontal - High Coanda effect

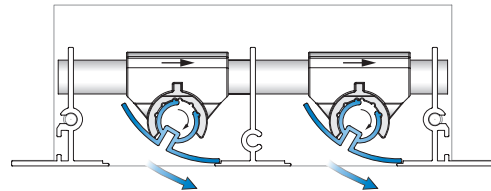

Horizontal - High air capacity

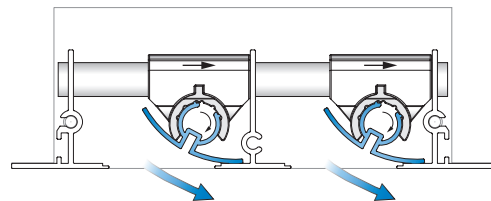


Vertical / Straight

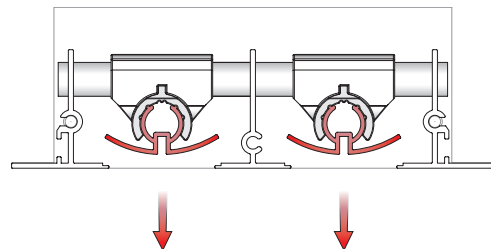

Extract air

Used for extract air, the moveable/rotatable deflectors are not necessary, but to keep the aesthetic design, the diffuser can still be equipped with the aluminium blade deflectors.

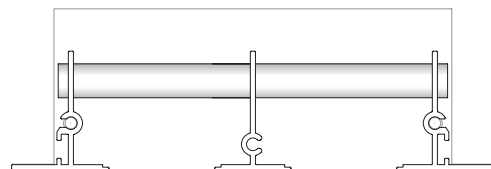

LindQST

Use the advanced Lindab web tool LindQST to [calculate](#) the full range of slot diffusers and to find the suitable diffuser type and dimension for all applications.

Product selection, room dimensioning and documentation search are easy available directly on web and mobile devices.

Find this and much more on www.lindQST.com.

Slot diffuser


LTD

Installation


The diffusers are installed with a plenum box by suspension with quick fix connectors.

More details see [installation instruction](#).

Click on the included Quick fixes to the LTD.

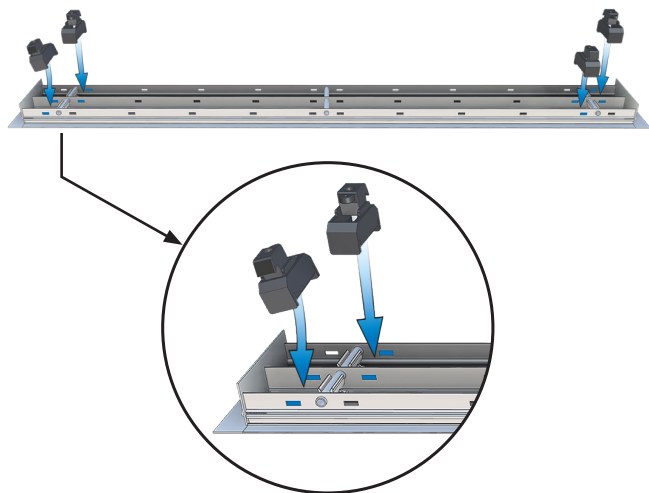

Click the diffuser into the plenum.

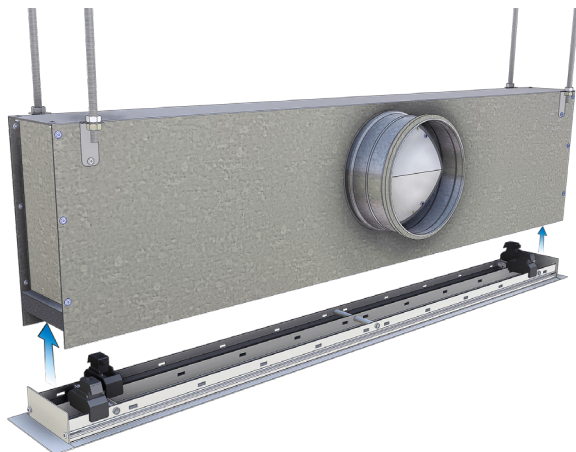

Remember to tighten the quick fix connectors with a screwdriver. [See installation instruction](#).


Maintenance

Remove the diffuser to gain access to the plenum box, damper and duct.

External parts should be wiped with a damp cloth.

In-line installation

Use the rail type connecting plates to connect two diffusers to each other.

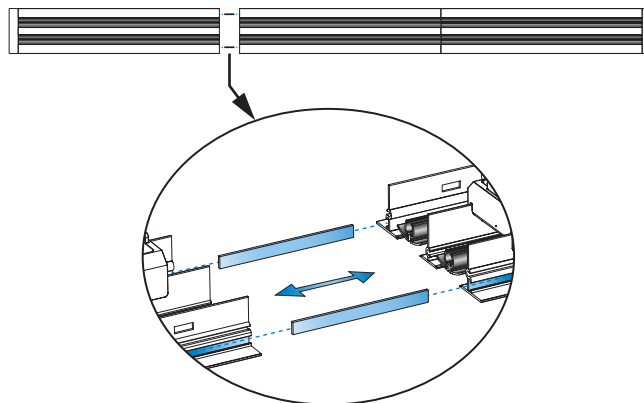

Line division table

< 4.000 mm	In 2 equal parts
4.100 mm	1500 + 1100 + 1.500
....	1.500 + + 1.500
5.000 mm	1.500 + 2.000 + 1.500
5.100 mm	2.000 + 1.100 + 2.000
....	2.000 + + 2.000
6.000 mm	2.000 + 2.000 + 2.000
6.100 mm	2.000 + 1.100 + 1.100 + 2.000
6.200 mm	2.000 + 1.100 + 1.100 + 2.000
....	2.000 + + + 2.000
7.000 mm	2.000 + 1.500 + 1.500 + 2.000
7.100 mm	2.000 + 2.000 + 1.100 + 2.000
....	2.000 + 2.000 + + 2.000
8.000 mm	2.000 + 2.000 + 2.000 + 2.000
8.100 mm	2.000 + 2.000 + 1.000 + 1.100 + 2.000
....	2.000 + 2.000 + 1.000 + + 2.000
9.000 mm	2.000 + 2.000 + 1.000 + 2.000 + 2.000
9.100 mm	2.000 + 2.000 + 1.100 + 2.000 + 2.000
....	2.000 + 2.000 + + 2.000 + 2.000
10.000 mm	2.000 + 2.000 + 2.000 + 2.000 + 2.000

Plenum box

LTD

Description


GB, JB, NB and KB are rectangular plenum boxes for the linear slot diffuser LTD used for supply or extract air intended to achieve a stable airflow into diffusers. The plenums are available with several types of insulation options and supply or extract damper.

Plenums:


- GB – without insulation
- JB – 5 mm inside thermal insulation
- NB – 5 mm outside thermal insulation
- KB – 15 mm inside acoustic insulation
- The dampers C and E are rotating dampers for supply and extract respectively.

Plenum box GB/JB/NB/KB dimensions

GB, JB, NB, KB one connection

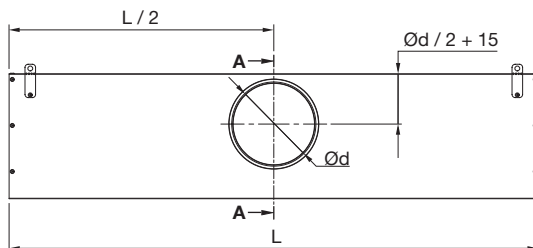

GB, JB, NB, KB two connection

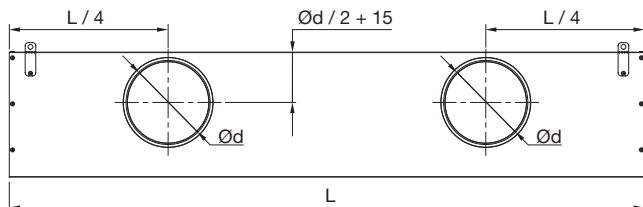

Order code


Product	aa	b	25	c	dddd
Type					
GB, JB, NB, KB					
Damper type					
C Supply air					
E Extract air					
x No damper					
Nominal slot width					
25					
Number of slots					
1, 2, 3, 4, 5, 6					
Length					
300-2000 (In steps of 50 mm)					

Example: GB-x-25-3-1000


Example: KB-C-25-4-1200

GB/JB/NB/KB dimensions

GB, JB 1 slot




GB, JB 2-6 slots




$$x^*: \text{Ød} \leq 200 \Rightarrow x = 79, \text{Ød} > 200 \Rightarrow x = 119$$


NB 1 slot



NB 2-6 slots



KB 1-6 slots



LTD-25+box

No. of slots	W1 mm	W2 mm	w mm	Ød mm	No. of conn.	H1 mm	H2 mm	L mm
1	103	103	52	125	1	185	185	300 - 800
1	103	103	52	160	1	196	196	801 - 1100
1	103	103	52	160	2	196	196	1101 - 2000
2	95	125	95	125	1	225	185	300 - 500
2	97	125	95	160	1	236	196	501 - 1100
2	97	125	95	160	2	236	196	1101 - 2000
3	140	168	138	160	1	236	196	300 - 1100
3	140	168	138	160	2	236	236	1101 - 1300
3	140	168	138	200	2	276	236	1301 - 2000
4	183	208	181	200	1	276	236	300 - 800
4	183	208	181	250	1	326	286	801 - 1100
4	183	208	181	250	2	326	286	1101 - 2000
5	226	254	224	200	1	276	236	300 - 700
5	226	254	224	250	1	326	286	701 - 1100
5	226	254	224	250	2	326	286	1101 - 2000
6	269	297	267	200	1	276	236	300 - 500
6	269	297	267	250	1	326	286	501 - 1100
6	269	297	267	250	2	326	286	1101 - 2000

Materials & finish

Plenum box:	Galvanised Steel
Standard finishing:	Galvanised steel
Insulation :	- 5 mm, thermal insulation / inside or outside
	- 15 mm, acoustic insulation

Plenum box


LTD

Plenum box Insulation

Without insulation, GB


GB, 1 slot

A-A



GB, 2-6 slots


A-A



5 mm internal insulation Thermal, JB


JB, 1 slot

A-A



JB, 2-6 slots


A-A



5 mm external insulation Thermal, NB


NB, 1 slot

Side view




NB, 1 slot

A-A



NB, 2-6 slots


A-A



15 mm internal insulation, acoustic, KB


KB, 2 slot

Side view



KB, 1-6 slots

A-A






Accessories

C damper

Supply damper with rotating blade is:




- Easy to mount and dismount into/from the plenum spigot
- Equipped with a measuring system that allows adjustment of the pressure drop
- Easy to adjust from the front side of the diffuser

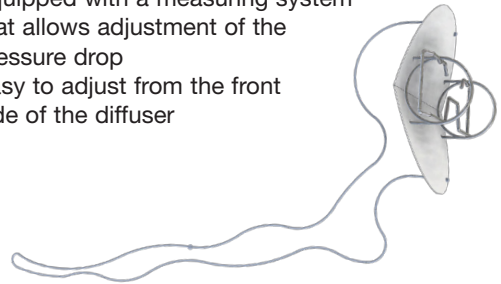

E damper

Extract damper with rotating blade is:

- Easy to mount and dismount into/from the plenum spigot
- Equipped with a measuring system that allows adjustment of the pressure drop
- Easy to adjust from the front side of the diffuser

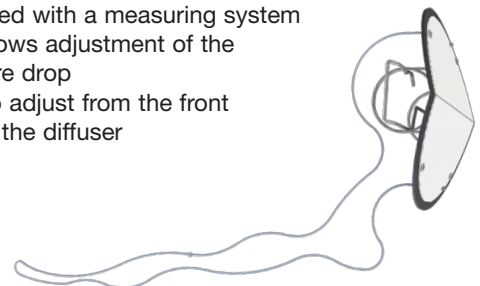


Slot diffuser

LTD

Quick selection

Supply LTD-25 - High coanda effect



[mm]				Airflow														
				m3/h	50	100	150	200	250	300	350	400	500	600	700	800	900	1000
				l/s	14	28	42	56	69	83	97	111	139	167	194	222	250	278
1 slot	600	Lwa	[dB(A)]	25	42													
		ΔPt	[Pa]	10	40													
		l0.2	[m]	4,9	12,6													
	800	Lwa	[dB(A)]	22	36													
		ΔPt	[Pa]	6	24													
		l0.2	[m]	3	9,2													
	1000	Lwa	[dB(A)]		31	42												
		ΔPt	[Pa]		14	32												
		l0.2	[m]		6,8	11,6												
	1200	Lwa	[dB(A)]	20	28	38												
		ΔPt	[Pa]	2	9	21												
		l0.2	[m]	1,4	5,1	9,4												
	1500	Lwa	[dB(A)]	20	23	33	41											
		ΔPt	[Pa]	2	6	14	25											
		l0.2	[m]	1	3,6	7	10,5											
	2000	Lwa	[dB(A)]	20	22	27	34	40										
		ΔPt	[Pa]	1	4	8	14	22										
		l0.2	[m]	0,5	2,2	4,5	7,3	10										
2 slots	600	Lwa	[dB(A)]		28	38												
		ΔPt	[Pa]		11	24												
		l0.2	[m]		7,3	12,1												
	800	Lwa	[dB(A)]		23	32	39											
		ΔPt	[Pa]		7	15	26											
		l0.2	[m]		4,7	8,8	12,3											
	1000	Lwa	[dB(A)]		23	27	34	40										
		ΔPt	[Pa]		5	10	18	29										
		l0.2	[m]		3,2	6,4	9,7	12,5										
	1200	Lwa	[dB(A)]	20	22	24	31	36	41									
		ΔPt	[Pa]	1	3	6	11	17	24									
		l0.2	[m]	0,6	2,3	4,8	7,6	10,3	12,7									
	1500	Lwa	[dB(A)]	20	22	24	26	32	36	40	43							
		ΔPt	[Pa]	0	2	4	7	11	16	22	29							
		l0.2	[m]	0,4	1,6	3,3	5,5	7,8	10	12,1	13,8							
	2000	Lwa	[dB(A)]	20	22	24	26	28	30	34	37	43						
		ΔPt	[Pa]	0	1	3	5	7	10	14	18	29						
		l0.2	[m]	0,2	0,9	2	3,5	5,1	6,9	8,7	10,4	13,5						

20 ≤ L_{WA} < 3030 ≤ L_{WA} < 4040 ≤ L_{WA} < 45


Next page - High coanda effect 3-4 slots

Slot diffuser

LTD

Quick selection

Supply LTD-25 - High coanda effect



[mm]				Airflow																
				m3/h	50	100	150	200	250	300	350	400	500	600	700	800	900	1000	1200	1400
				l/s	14	28	42	56	69	83	97	111	139	167	194	222	250	278	333	389
3 slots	600	Lwa	[dB(A)]		23	29	37	42												
		ΔPt	[Pa]		5	12	22	34												
		l0.2	[m]		4,7	8,8	12,3	15,1												
	800	Lwa	[dB(A)]		23	27	32	36	41											
		ΔPt	[Pa]		4	8	14	22	32											
		l0.2	[m]		2,9	5,8	8,9	11,7	14											
	1000	Lwa	[dB(A)]		23	27	32	36	40	44										
		ΔPt	[Pa]		3	6	11	16	24	32										
		l0.2	[m]		1,9	4,1	6,5	9	11,3	13,3										
	1200	Lwa	[dB(A)]	20	22	24	26	28	32	36	40									
		ΔPt	[Pa]	0	1	3	5	9	12	17	22									
		l0.2	[m]	0,3	1,4	3	4,9	7,1	9,2	11,1	12,9									
	1500	Lwa	[dB(A)]		21	22	23	25	28	32	35	41								
		ΔPt	[Pa]		1	2	3	5	7	10	13	20								
		l0.2	[m]		0,9	2	3,4	5	6,8	8,5	10,2	13,2								
	2000	Lwa	[dB(A)]		21	22	23	25	26	27	29	35	39	43						
		ΔPt	[Pa]		1	1	2	3	5	6	8	13	18	25						
		l0.2	[m]		0,5	1,2	2,1	3,2	4,4	5,7	7	9,7	12,2	14,3						
4 slots	600	Lwa	[dB(A)]		20	24	31	36	41	44										
		ΔPt	[Pa]		3	6	11	18	26	35										
		l0.2	[m]		3,1	6,2	9,4	12,2	14,4	16,3										
	800	Lwa	[dB(A)]		20	23	26	30	35	39	42									
		ΔPt	[Pa]		2	4	7	11	16	22	29									
		l0.2	[m]		1,9	3,9	6,3	8,8	11	13	14,7									
	1000	Lwa	[dB(A)]		20	21	21	26	30	34	37	43								
		ΔPt	[Pa]		1	2	4	6	8	11	15	23								
		l0.2	[m]		1,2	2,7	4,5	6,4	8,4	10,3	12	14,9								
	1200	Lwa	[dB(A)]		20	21	21	22	27	30	34	39	44							
		ΔPt	[Pa]		1	1	3	4	6	8	10	16	23							
		l0.2	[m]		0,9	1,9	3,3	4,8	6,5	8,2	9,8	12,7	15,1							
	1500	Lwa	[dB(A)]		20	21	21	22	23	26	29	35	39	43						
		ΔPt	[Pa]		0	1	2	3	4	5	7	11	16	21						
		l0.2	[m]		0,6	1,3	2,2	3,4	4,6	6	7,4	10	12,5	14,5						
	2000	Lwa	[dB(A)]		20	21	21	22	23	24	25	29	33	37	40	43				
		ΔPt	[Pa]		0	1	1	2	2	3	4	7	9	13	17	21				
		l0.2	[m]		0,3	0,7	1,3	2	2,9	3,8	4,8	6,9	9,1	11,1	12,9	14,6				

Data valid for isothermal supply 1-way.
Other sizes, settings and flows,
Go to [LindQST Calculator](#)

 $20 \leq L_{WA} < 30$
 $30 \leq L_{WA} < 40$
 $40 \leq L_{WA} < 45$


Next page - High coanda effect 5-6 slots

Slot diffuser

LTD

Quick selection

Supply LTD-25 - High coanda effect



[mm]				Airflow														
				m3/h	50	100	150	200	250	300	350	400	500	600	700	800	900	1000
				l/s	14	28	42	56	69	83	97	111	139	167	194	222	250	278
5 slots	600	Lwa	[dB(A)]		20	23	26	32	36	40	44							
		ΔPt	[Pa]		2	5	8	13	18	25	32							
		l0.2	[m]		2,1	4,4	7	9,5	11,8	13,7	15,4							
	800	Lwa	[dB(A)]		20	21	21	25	30	34	37	43						
		ΔPt	[Pa]		1	2	4	6	8	12	15	23						
		l0.2	[m]		1,2	2,7	4,5	6,4	8,4	10,3	12	14,8						
	1000	Lwa	[dB(A)]		20	21	21	22	25	29	33	38	43					
		ΔPt	[Pa]		1	1	2	4	6	8	10	15	22					
		l0.2	[m]		0,8	1,8	3,1	4,5	6,1	7,8	9,3	12,2	14,5					
	1200	Lwa	[dB(A)]		20	21	21	22	23	25	29	35	39	43				
		ΔPt	[Pa]		0	1	2	3	4	5	7	11	16	22				
		l0.2	[m]		0,6	1,3	2,2	3,3	4,6	6	7,3	10	12,3	14,3				
	1500	Lwa	[dB(A)]		20	21	21	22	23	24	25	30	34	38	42			
		ΔPt	[Pa]		0	1	1	2	3	4	5	7	11	15	19			
		l0.2	[m]		0,3	0,8	1,5	2,3	3,2	4,2	5,3	7,5	9,7	11,7	13,5			
	2000	Lwa	[dB(A)]		20	21	21	22	23	24	25	26	28	32	36	39	41	
		ΔPt	[Pa]		0	0	1	1	2	2	3	5	7	9	12	15	19	
		l0.2	[m]		0,2	0,5	0,9	1,4	1,9	2,6	3,3	4,9	6,6	8,3	10	11,6	13,1	
6 slots	600	Lwa	[dB(A)]		20	21	21	27	32	36	40							
		ΔPt	[Pa]		1	3	5	8	11	15	20							
		l0.2	[m]		1,5	3,1	5,1	7,3	9,4	11,3	12,9							
	800	Lwa	[dB(A)]		20	21	21	22	26	30	33	40						
		ΔPt	[Pa]		1	2	3	5	7	9	12	18						
		l0.2	[m]		0,8	1,9	3,2	4,7	6,3	7,9	9,5	12,3						
	1000	Lwa	[dB(A)]		20	21	21	22	23	25	28	34	39	44				
		ΔPt	[Pa]		0	1	2	3	4	6	8	12	17	23				
		l0.2	[m]		0,5	1,2	2,1	3,2	4,4	5,7	7,1	9,7	12	14				
	1200	Lwa	[dB(A)]		20	21	21	22	23	24	25	30	35	39	43			
		ΔPt	[Pa]		0	1	1	2	3	4	6	9	12	17	22			
		l0.2	[m]		0,4	0,9	1,5	2,3	3,3	4,3	5,4	7,6	9,8	11,8	13,5			
	1500	Lwa	[dB(A)]		20	21	21	22	23	24	25	26	30	34	38	41	44	
		ΔPt	[Pa]		0	1	1	1	2	3	4	6	9	12	15	19	24	
		l0.2	[m]		0,2	0,6	1	1,6	2,2	2,9	3,7	5,5	7,3	9,1	10,9	12,4	13,8	
	2000	Lwa	[dB(A)]		20	21	21	22	23	24	25	26	28	30	32	35	37	42
		ΔPt	[Pa]		0	0	1	1	1	2	2	4	6	7	10	12	15	22
		l0.2	[m]		0,1	0,3	0,6	0,9	1,3	1,8	2,3	3,5	4,8	6,2	7,6	9	10,4	12,9

Data valid for isothermal supply
1-way.
Other sizes, settings and flows,
Go to [LindQST Calculator](#)

20 ≤ L_{WA} < 3030 ≤ L_{WA} < 4040 ≤ L_{WA} < 45


Next page - High air capacity

Slot diffuser

LTD

Quick selection

Supply LTD-25 - High air capacity



[mm]			Airflow																
			m3/h	50	100	150	200	250	300	350	400	500	600	700	800	900	1000	1200	1400
			l/s	14	28	42	56	69	83	97	111	139	167	194	222	250	278	333	389
1 slot	600	Lwa	[dB(A)]	22	36														
		ΔPt	[Pa]	6	26														
		l0.2	[m]	0,9	5,4														
	800	Lwa	[dB(A)]	22	30	40													
		ΔPt	[Pa]	4	16	36													
		l0.2	[m]	0,5	2,7	7,2													
	1000	Lwa	[dB(A)]		26	36	42												
		ΔPt	[Pa]		9	21	37												
		l0.2	[m]		1,5	4,4	8,3												
	1200	Lwa	[dB(A)]	20	23	32	39	44											
		ΔPt	[Pa]	2	6	14	24	38											
		l0.2	[m]	0,2	1	2,8	5,7	9,1											
	1500	Lwa	[dB(A)]	20	22	28	35	40	44										
		ΔPt	[Pa]	1	4	9	16	25	36										
		l0.2	[m]	0,1	0,6	1,6	3,4	5,8	8,6										
	2000	Lwa	[dB(A)]	20	22	24	29	34	39	42									
		ΔPt	[Pa]	1	2	5	9	15	21	29									
		l0.2	[m]	0,1	0,3	0,8	1,7	3	4,7	6,7									
2 slots	600	Lwa	[dB(A)]		23	34	41												
		ΔPt	[Pa]		8	18	32												
		l0.2	[m]		1,7	4,8	8,9												
	800	Lwa	[dB(A)]		23	27	35	41											
		ΔPt	[Pa]		5	11	20	31											
		l0.2	[m]		0,8	2,4	4,9	8											
	1000	Lwa	[dB(A)]		23	27	32	36	41										
		ΔPt	[Pa]		4	8	14	22	32										
		l0.2	[m]		0,5	1,3	2,8	5	7,5										
	1200	Lwa	[dB(A)]	20	22	24	26	32	37	41	44								
		ΔPt	[Pa]	0	2	4	8	12	18	24	32								
		l0.2	[m]	0,1	0,3	0,9	1,8	3,2	5,1	7,2	9,3								
	1500	Lwa	[dB(A)]	20	22	24	26	28	31	36	39								
		ΔPt	[Pa]	0	1	3	5	9	12	17	22								
		l0.2	[m]	0	0,2	0,5	1	1,8	3	4,4	6								
	2000	Lwa	[dB(A)]	20	22	24	26	28	30	32	35	39	44						
		ΔPt	[Pa]	0	1	2	4	6	8	11	14	22	32						
		l0.2	[m]	0	0,1	0,3	0,5	0,9	1,4	2,2	3,1	5,4	8,1						

Data valid for isothermal supply
1-way.
Other sizes, settings and flows,
Go to [LindQST Calculator](#)

 $20 \leq L_{WA} < 30$
 $30 \leq L_{WA} < 40$
 $40 \leq L_{WA} < 45$


Next page - High air capacity 3-4 slots

Slot diffuser

LTD

Quick selection

Supply LTD-25 - High air capacity



[mm]				Airflow														
				m3/h	50	100	150	200	250	300	350	400	500	600	700	800	900	1000
				l/s	14	28	42	56	69	83	97	111	139	167	194	222	250	278
3 slots	600	Lwa	[dB(A)]			23	27	32	37	42								
		ΔPt	[Pa]			4	9	16	25	35								
		l0.2	[m]			0,9	2,5	5,2	8,4	11,5								
	800	Lwa	[dB(A)]			23	27	32	36	40	44							
		ΔPt	[Pa]			3	6	11	17	24	33							
		l0.2	[m]			0,4	1,2	2,6	4,5	6,9	9,4							
	1000	Lwa	[dB(A)]			23	27	32	36	40	44							
		ΔPt	[Pa]			2	5	8	13	19	26							
		l0.2	[m]			0,3	0,7	1,5	2,6	4,2	6							
	1200	Lwa	[dB(A)]	20	22	24	26	28	30	32	35	40						
		ΔPt	[Pa]	0	1	2	4	6	9	12	16	25						
		l0.2	[m]	0	0,2	0,5	0,9	1,7	2,7	3,9	5,5	8,8						
	1500	Lwa	[dB(A)]			21	22	23	25	26	27	30	36	40	44			
		ΔPt	[Pa]			1	1	2	4	5	7	9	14	20	28			
		l0.2	[m]			0,1	0,3	0,5	0,9	1,5	2,3	3,2	5,6	8,3	11			
	2000	Lwa	[dB(A)]			21	22	23	25	26	27	29	31	34	38	42		
		ΔPt	[Pa]			0	1	1	2	3	4	6	9	13	18	23		
		l0.2	[m]			0	0,1	0,3	0,5	0,8	1,1	1,6	2,8	4,5	6,5	8,6		
4 slots	600	Lwa	[dB(A)]			20	23	26	31	35	39	42						
		ΔPt	[Pa]			2	4	8	12	18	24	32						
		l0.2	[m]			0,5	1,5	3,1	5,4	8	10,5	12,8						
	800	Lwa	[dB(A)]			20	23	26	28	31	34	37	42					
		ΔPt	[Pa]			1	3	5	8	12	16	21	33					
		l0.2	[m]			0,3	0,7	1,5	2,7	4,2	6,1	8,1	11,9					
	1000	Lwa	[dB(A)]			20	21	21	22	25	29	32	38	42				
		ΔPt	[Pa]			1	1	2	4	5	7	10	15	22				
		l0.2	[m]			0,2	0,4	0,8	1,5	2,4	3,6	5	8,2	11,3				
	1200	Lwa	[dB(A)]			20	21	21	22	23	26	29	34	38	42			
		ΔPt	[Pa]			0	1	2	3	4	5	7	11	16	21			
		l0.2	[m]			0,1	0,3	0,5	1	1,5	2,3	3,2	5,6	8,3	11			
	1500	Lwa	[dB(A)]			20	21	21	22	23	24	25	30	34	38	41	44	
		ΔPt	[Pa]			0	1	1	2	3	4	5	7	11	14	19	24	
		l0.2	[m]			0,1	0,2	0,3	0,6	0,9	1,3	1,9	3,3	5,2	7,4	9,6	11,8	
	2000	Lwa	[dB(A)]			20	21	21	22	23	24	25	26	28	32	35	38	41
		ΔPt	[Pa]			0	0	1	1	2	2	3	5	7	9	12	15	18
		l0.2	[m]			0	0,1	0,2	0,3	0,4	0,7	0,9	1,6	2,6	3,9	5,4	7,1	8,8

Data valid for isothermal supply
1-way.
Other sizes, settings and flows,
Go to [LindQST Calculator](#)

20 ≤ L_{WA} < 3030 ≤ L_{WA} < 4040 ≤ L_{WA} < 45


Next page - High air capacity 5-6 slots

Slot diffuser

LTD

Quick selection

Supply LTD-25 - High air capacity



				Airflow																			
				m3/h	50	100	150	200	250	300	350	400	500	600	700	800	900	1000	1200	1400			
				l/s	14	28	42	56	69	83	97	111	139	167	194	222	250	278	333	389			
[mm]																							
5 slots	600	Lwa	[dB(A)]		20	23	26	28	31	36	39				Data valid for isothermal supply 1-way. Other sizes, settings and flows, Go to LindQST Calculator								
		ΔPt	[Pa]		2	3	6	10	14	19	24												
		l0.2	[m]		0,3	0,9	1,9	3,4	5,3	7,5	9,6												
	800	Lwa	[dB(A)]		20	21	21	22	25	29	33	39	44										
		ΔPt	[Pa]		1	1	3	4	6	8	11	16	24										
		l0.2	[m]		0,2	0,4	0,9	1,6	2,6	3,9	5,4	8,7	11,8										
	1000	Lwa	[dB(A)]		20	21	21	22	23	24	28	34	39	43									
		ΔPt	[Pa]		0	1	2	3	4	5	7	11	16	21									
		l0.2	[m]		0,1	0,3	0,5	0,9	1,5	2,2	3,2	5,5	8,1	10,8									
	1200	Lwa	[dB(A)]		20	21	21	22	23	24	25	29	34	39	42								
		ΔPt	[Pa]		0	1	1	2	3	4	5	8	11	16	20								
		l0.2	[m]		0,1	0,2	0,3	0,6	0,9	1,4	2	3,6	5,6	7,8	10,1								
	1500	Lwa	[dB(A)]		20	21	21	22	23	24	25	26	29	33	37	40	43						
		ΔPt	[Pa]		0	0	1	1	2	3	3	5	8	11	14	18	22						
		l0.2	[m]		0	0,1	0,2	0,4	0,6	0,8	1,1	2	3,3	4,8	6,6	8,4	10,3						
	2000	Lwa	[dB(A)]		20	21	21	22	23	24	25	26	28	30	32	34	37	42					
		ΔPt	[Pa]		0	0	1	1	1	2	2	4	5	7	9	12	14	21					
		l0.2	[m]		0	0	0,1	0,2	0,3	0,4	0,6	1	1,6	2,4	3,4	4,6	5,9	8,8					
6 slots	600	Lwa	[dB(A)]		20	21	21	22	27	32	36	43											
		ΔPt	[Pa]		1	2	4	6	9	12	15	24											
		l0.2	[m]		0,2	0,6	1,2	2,2	3,5	5,1	6,9	10,5											
	800	Lwa	[dB(A)]		20	21	21	22	23	24	28	35	41										
		ΔPt	[Pa]		1	1	2	3	5	7	9	14	20										
		l0.2	[m]		0,1	0,3	0,6	1,1	1,7	2,5	3,6	6,1	8,9										
	1000	Lwa	[dB(A)]		20	21	21	22	23	24	25	29	35	39	44								
		ΔPt	[Pa]		0	1	1	2	3	5	6	9	13	18	24								
		l0.2	[m]		0,1	0,2	0,3	0,6	1	1,4	2	3,6	5,6	7,9	10,1								
	1200	Lwa	[dB(A)]		20	21	21	22	23	24	25	26	30	35	39	42							
		ΔPt	[Pa]		0	1	1	2	2	3	4	7	10	13	17	22							
		l0.2	[m]		0	0,1	0,2	0,4	0,6	0,9	1,3	2,3	3,7	5,4	7,2	9,2							
	1500	Lwa	[dB(A)]		20	21	21	22	23	24	25	26	28	30	33	37	40						
		ΔPt	[Pa]		0	0	1	1	2	2	3	5	7	9	12	15	19						
		l0.2	[m]		0	0,1	0,1	0,2	0,4	0,5	0,7	1,3	2,1	3,2	4,4	5,9	7,4						
	2000	Lwa	[dB(A)]		20	21	21	22	23	24	25	26	28	30	32	33	35	38	42				
		ΔPt	[Pa]		0	0	1	1	1	2	2	3	5	6	8	10	13	18	25				
		l0.2	[m]		0	0	0,1	0,1	0,2	0,3	0,4	0,7	1	1,5	2,2	3	3,9	6,1	8,5				

Data valid
for isothermal supply
1-way.
Other sizes,
settings and flows,
Go to
[LindQST Calculator](#)

 $20 \leq L_{WA} < 30$
 $30 \leq L_{WA} < 40$
 $40 \leq L_{WA} < 45$



Good Thinking

At Lindab, good thinking is a philosophy that guides us in everything we do. We have made it our mission to create a healthy indoor climate – and to simplify the construction of sustainable buildings. We do that by designing innovative products and solutions that are easy to use, as well as offering efficient availability and logistics. We are also working on ways to reduce our impact on our environment and climate. We do that by developing methods to produce our solutions using a minimum of energy and natural resources, and by reducing negative effects on the environment. We use steel in our products. It's one of few materials that can be recycled an infinite number of times without losing any of its properties. That means less carbon emissions in nature and less energy wasted.

We simplify construction